

STP-36-NE

Cable Placer

WORKING HEIGHT: 40 ft 6 in (12.3 m)

HORIZONTAL REACH: 26 ft 6 in (8.1 m)

PLATFORM CAPACITY: 350 lbs (160 kg)

MOBILE OPERATION

Up to
400 LBS (180 KG)
SIDE PULL



VERSALIFT is a leading manufacturer of bucket trucks, digger derricks, aerial lifts and other specialty equipment for power generation, transmission and distribution, investor-owned utility, telecommunications, light and sign, and tree care industries. Working with co-ops, municipalities, government agencies and corporations through its global network of facilities and family of dealers, the company employs nearly 800 associates worldwide.

STP-36-NE

Cable Placer



GENERAL SPECIFICATIONS:

Horizontal Reach	26 ft 6 in (8.1 m)
Platform Capacity	350 lbs (160 kg)
Cable Down Load Capacity	50 lbs (23 kg)
Total Unit Capacity (Platform + Cable Down Load)	350 lbs (160 kg)
Side Pull Capacity (Fairlead retracted)	400 lbs (180 kg)
Side Pull Capacity (Fairlead extended)	350 lbs (160 kg)

WITH STANDARD PEDESTAL:


Height to Bottom of Platform	35 ft 6 in (10.8 m)
Working Height	40 ft 6 in (12.3 m)
Stowed Travel Height	10 ft 6 in (3.2 m)
Weight of Lift	2400 lbs (1090 kg)

HYDRAULIC SYSTEM:

Operating Pressure	2250 psi (155 bar)
Flow Rate	2 gpm (8 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Open Center

BOOM ACTION:

Outer/Inner Boom Articulation	-14° to +74°
Lower Boom Travel	-6° to +90°
Inner Boom Extension	116 in (2.9 m)
Rotation	370° Non-Continuous

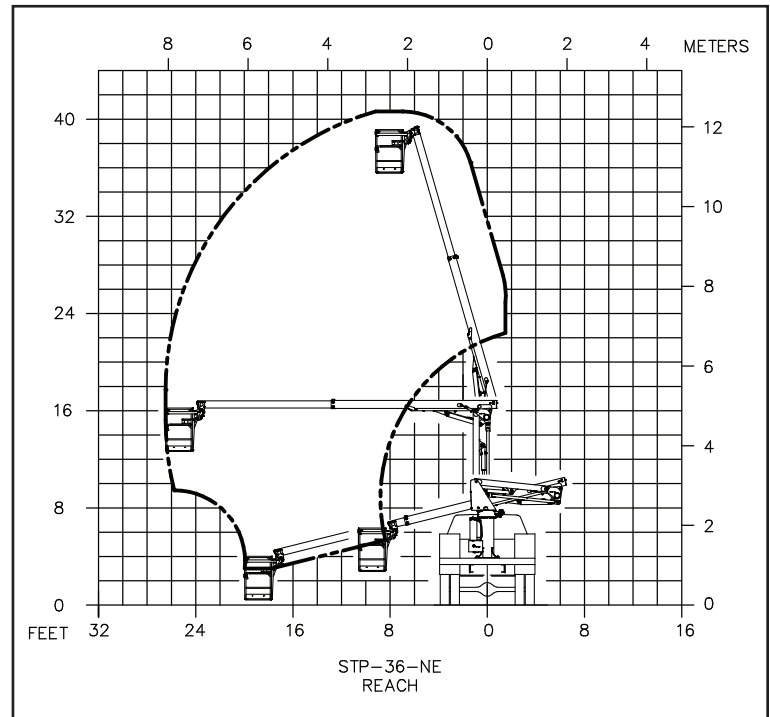

OPTIONS:

- Lift Eye
- Fairleads
- Backup 12-Volt Pump
- Pneumatic Airline(s) to Platform
- Various Tool Trays
- Emergency Lowering
- 120V to Platform

Note: Specifications on units may vary or change without prior notifications due to option selections.

REV. 10/18