

VST-5000/5500/6000-I

Insulated Articulated/Telescopic Aerial Device

WORKING HEIGHT: Up to 65 ft 1 in (19.8 m)

HORIZONTAL REACH: Up to 38 ft 9 in (11.8 m)

MAXIMUM PLATFORM CAPACITY: Up to 750 lbs (340 kg)

MATERIAL HANDLING

Available with
Various Options

TruGuard®
Standard



VST-6000-I model shown here with Material Handling option.



VERSALIFT is a leading global manufacturer of bucket trucks, digger derricks, cable placers and other specialty equipment for use in the power generation, transmission and distribution, investor-owned utility, telecommunications, bridge inspection, light and sign, and forestry industries. Providing equipment sales, service, training, warranty and financing to government agencies, corporations, contractors, co-ops and municipalities through its global network of facilities and distributors, the company employs more than 900 employees worldwide.

VST-5000/5500/6000-I

Insulated Articulated/Telescopic Aerial Device



VST-5000-I

VST-5500-I

VST-6000-I

GENERAL SPECIFICATIONS:

(Based on 40 in Frame)

Horizontal Reach	36 ft 8 in (11.2 m)	37 ft 11 in (11.6 m)	38 ft 9 in (11.8 m)
Maximum Platform Capacity	750 lbs (340 kg)	750 lbs (340 kg)	750 lbs (340 kg)
Inner Boom Extension	141 in (3.58 m)	141 in (3.58 m)	141 in (3.58 m)
Outer/Inner Boom Articulation +/- 2°	-25° to +85°	-25° to +85°	-25° to +85°
Lower Boom Articulation +/- 2°	0° to +92°	0° to +92°	0° to +86°
Rotation	360° Continuous	360° Continuous	360° Continuous

WITH STANDARD PEDESTAL:

Height to Bottom of Platform	49 ft 8 in (15.1 m)	55 ft 3 in (16.8 m)	60 ft 1 in (18.3 m)
Working Height	54 ft 8 in (16.7 m)	60 ft 3 in (18.4 m)	65 ft 1 in (19.8 m)
Stowed Travel Height	11 ft 11 in (3.6 m)	11 ft 11 in (3.6 m)	11 ft 11 in (3.6 m)

INSULATION GAP:


Upper Boom Fully Retracted	38 in (1.0 m)	51 in (1.3 m)	38 in (1.0 m)
Upper Boom Fully Extended	172 in (4.4 m)	185 in (4.7 m)	179 in (4.5 m)
Lower Boom	24 in (0.61 m)	24 in (0.61 m)	24 in (0.61 m)

HYDRAULIC SYSTEM:

Operating Pressure	3000 psi (207 bar)
Flow Rate	7.5 gpm (28 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Open Center

OPTIONS:

- Automatic Boom Latch
- Auxiliary Outriggers
- Backup 12-Volt Pump
- Jib up to 1000 lb (454 kg) capacity
- Various Jib Configurations
(Reduces Platform Capacity 100 lbs)
- Lift Eye (1000 lb max)
- Second Set of Tool Power Ports
- Various Platforms, Covers and Liners
- Tool Power at Ground Controls
- Two Speed Manual Throttle Control
- Taller Pedestal
- Platform Elevator

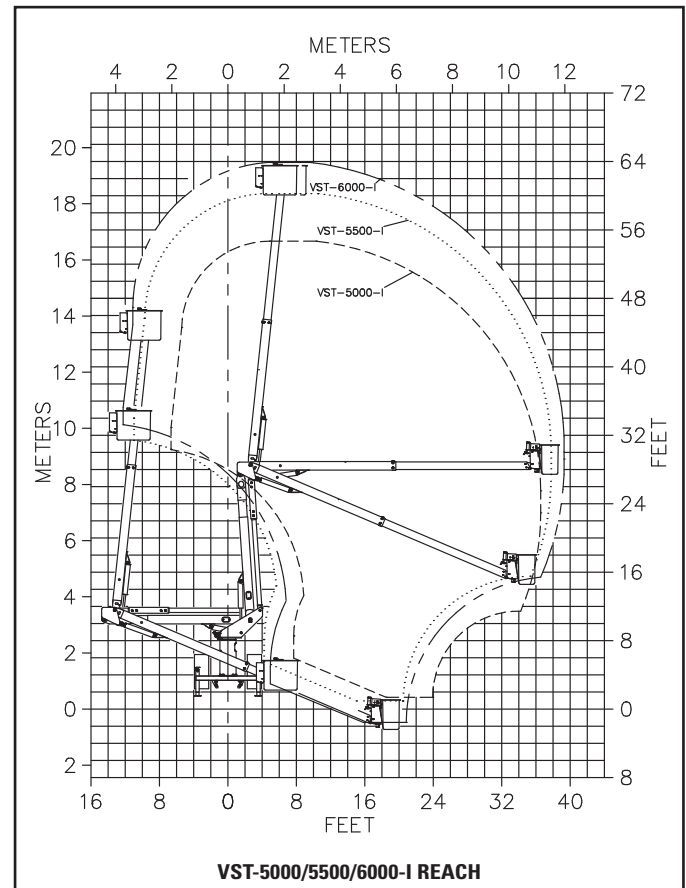

Note: Specifications on units may vary or change without prior notifications due to option selections.

REV. 02/19