

VTP-40-NE

Cable Placer Non-Insulated

WORKING HEIGHT:
40 ft (12.2 m)

HORIZONTAL REACH:
29 ft 7 in (9.0 m)

PLATFORM CAPACITY:
500 lbs (226 kg)



**FULL
PRESSURE**

Hydraulic Single
Stick Controls

**LARGE
PLATFORM**

32 in by 32 in

VTP-40-NE model shown here.



VERSALIFT is a leading global manufacturer of bucket trucks, digger derricks, cable placers and other specialty equipment for use in the power generation, transmission and distribution, investor-owned utility, telecommunications, bridge inspection, light and sign, and forestry industries. Providing equipment sales, service, training, warranty and financing to government agencies, corporations, contractors, co-ops and municipalities through its global network of facilities and distributors, the company employs more than 900 employees worldwide.

VTP-40-NE

Cable Placer Non-Insulated



GENERAL SPECIFICATIONS:

Horizontal Reach	29 ft 7 in (9.0 m)
Platform Capacity	500 lbs (226 kg)
Cable Down Load Capacity	150 lbs (68 kg)
Total Unit Capacity	500 lbs (226 kg)
Side Pull Capacity (Fairlead retracted)	600 lbs (270 kg)
Side Pull Capacity (Fairlead extended)	450 lbs (200 kg)
Outer/Inner Boom Travel	-20° to +80°
Inner Boom Extension	110 in (2.8 m)
Rotation	370° Non-Continuous

WITH 40 IN (1.02 M) TALL PEDESTAL (Standard):


Height to Bottom of Platform	35 ft (10.7 m)
Working Height	40 ft (12.2 m)
Stowed Travel Height	11 ft 6 in (3.5 m)

HYDRAULIC SYSTEM:

Operating Pressure	2250 psi (155 bar)
Flow Rate	12 gpm (45 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Closed Center
Power Source	PTO Pump

AVAILABLE FEATURES:

- Transferable Fairlead Support
- Rear Reel Drive
- Pendant Box Lower Controls
- Bull Wheel Cable Guide
- Reel Lift (6000 lb max)
- Lift Eye (2000 lb max) w/Lifting Chain
- Strand Tensioning Brakes
- Tow Line Winch with 70 ft Rope (21 m)
- Tool Trays
- Inverter for 110-Volt Power
- Strand Carrier (28 in wide/32 in dia)
- Reel Tensioning Brakes
- Intercom System
- 120-Volt GFCI Outlet at Platform
- Backup 12-Volt Pump
- Various Platform Fairlead Types
- Capstan Winch
- Hydraulic Tool Circuit at Ground
- Various Ropes
- Strand Drive

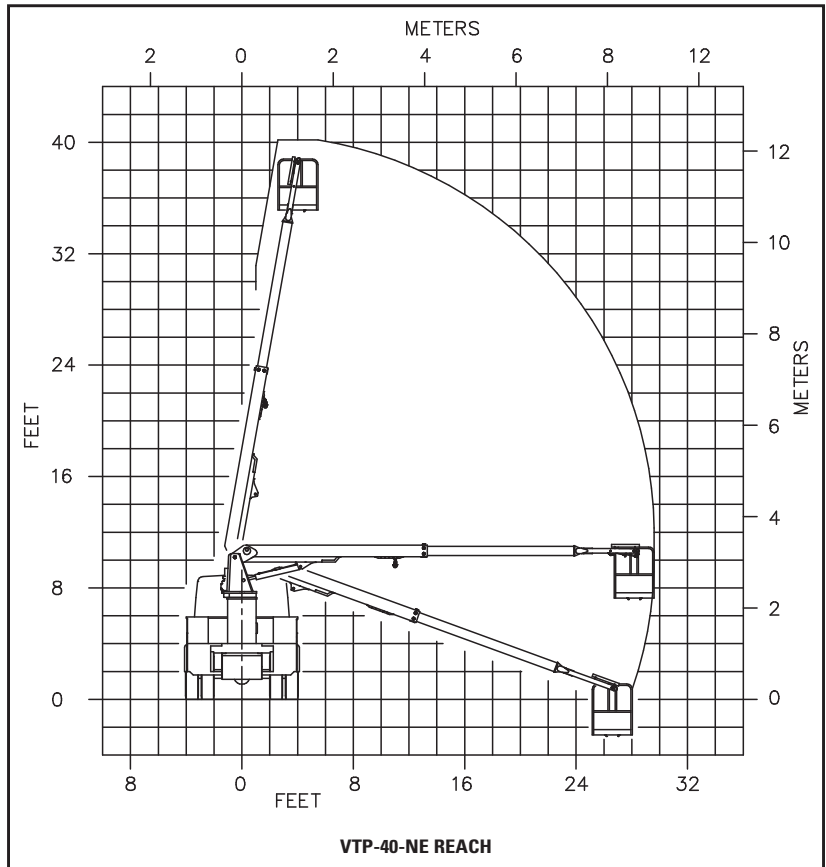

Note: Specifications on units may vary or change without prior notifications due to option selections.

REV. 02/19